
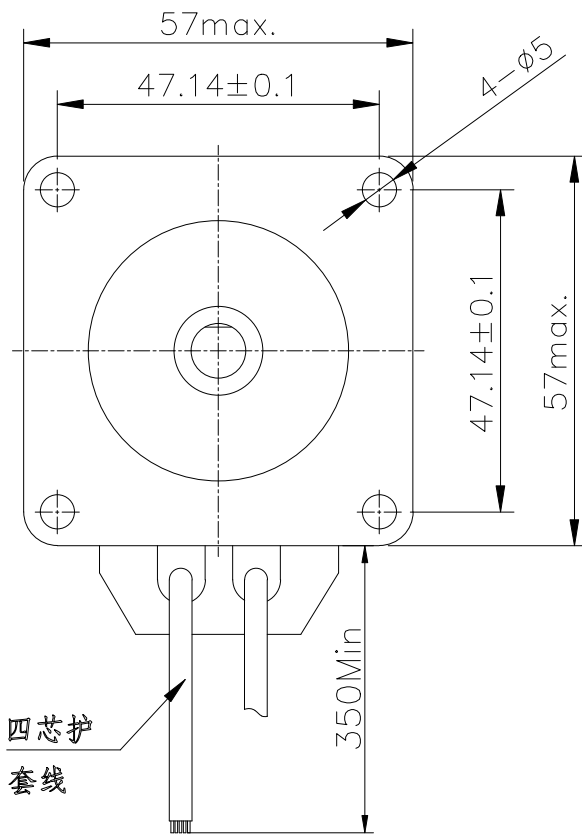


Dimension:
Unit=mm

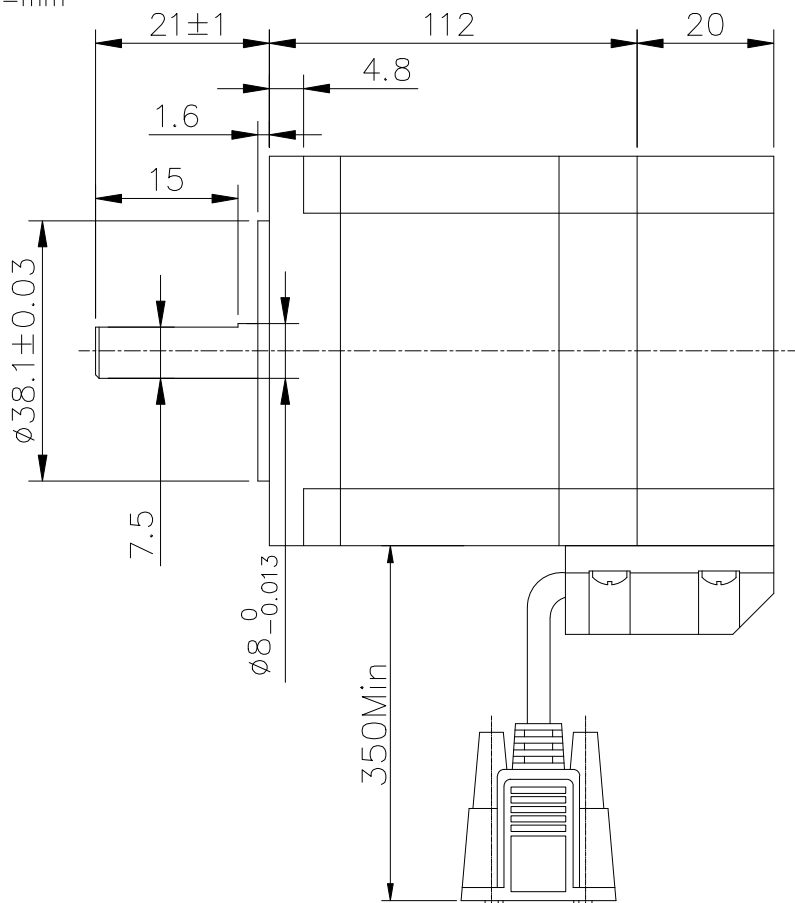


四芯护
套线

编码器接口—HDD15
公头

Specifications:

Phase	2		备注 Comment
Step Angle	1.8	deg.	
Voltage	3.8	V	
Current	4.2	A	
Resistance	0.9	Ω	
Inductance	3.8	mH	
Holding Torque	28	kg.cm	
Insulation Class	B		
Mass	1.4	kg	


Wiring Diagram:

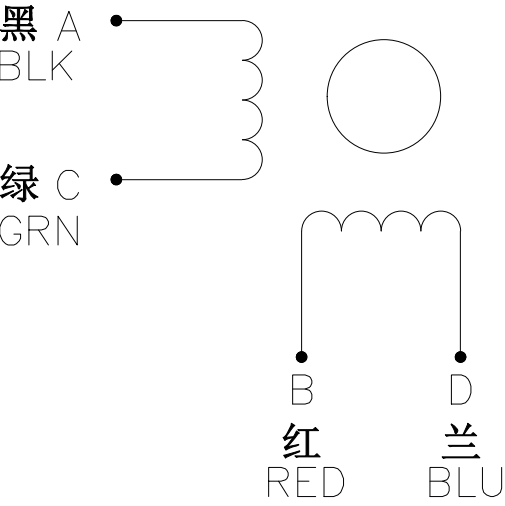

Encoder Wiring Diagram:

EA+	Encoder A phase input+	BLACK 黑
EA-	Encoder A phase input-	BLUE 蓝
EB+	Encoder B phase input+	YELLOW 黄
EB-	Encoder B phase input-	GREEN 绿
Vcc	Encoder Voltage(+5V)	RED 红
EGND	Encoder Grand(0V)	WHITE 白

电机引出线和编码器引出线的配
线，如下图编码器接口—HDD15母

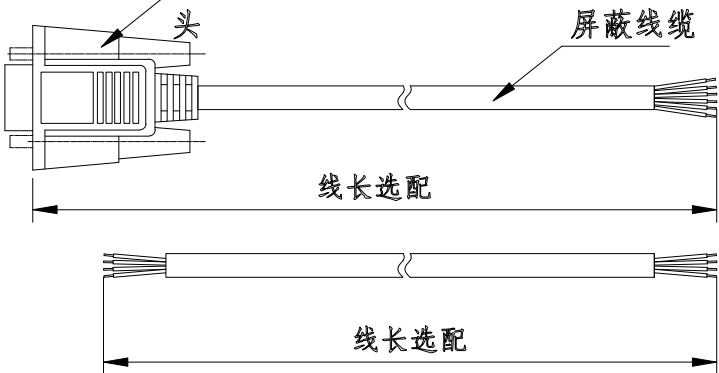

					Title: Specification			
REV.	QTY.	No.	SIG.	DATE				JK57HS112–4204BFED–0.35M
DESIGN			STD.		CLS.MAK	WEIGHT	SCALE	
								DIY Geek 
CHECK								
PROC.			APPR.		PAGE: OF PAGES			